

**SENESE**

**Cielo / Cielo Sans Concealed Shower Set**

Installation Guideline

Senese Srl p.iva 01602790527  
Loc. Frassi 34, 53011 Castellin in Chianti  
[senese.com](http://senese.com)

## Cielo Shower Set

### Concealed Shower Set

#### Article

Polished Brass	DS200LGCI ON 790 Eur incl. VAT
Polished Chrome	DS200LGCI CR 950 Eur incl. VAT
Aged Brass	DS200LGCI AB 1.020 Eur incl. VAT
Burnished Brass	DS200LGCI BB 1.020 Eur incl. VAT
Satin Nickel	DS200LGCI NS 1.180 Eur incl. VAT
Black Nickel	DS200LGCI NNO 1.180 Eur incl. VAT
Gold	DS200LGCI OR 1.450 Eur incl. VAT



## Cielo Sans Shower Set

### Shower Set with Rose

#### Article

Polished Brass	DS200LLCI ON 790 Eur incl. VAT
Polished Chrome	DS200LLCI CR 950 Eur incl. VAT
Aged Brass	DS200LLCI AB 1.020 Eur incl. VAT
Burnished Brass	DS200LLCI BB 1.020 Eur incl. VAT
Satin Nickel	DS200LLCI NS 1.180 Eur incl. VAT
Black Nickel	DS200LLCI NNO 1.180 Eur incl. VAT
Gold	DS200LLCI OR 1.450 Eur incl. VAT



## Installation Guide

### Before You Begin

- 1. Turn off the Water Supply**  
Ensure all water supply lines are completely shut off before beginning installation.
- 2. Flush Supply Lines**  
Run water through the supply lines to clear any debris or sediment. This prevents blockages or damage to internal components of the fixture.
- 3. Isolation Valves**  
We recommend installing isolation valves on the hot and cold inlet feeds for easier future maintenance.

### Installation Steps:

#### Mounting the Faucet Body

- Anchor the built-in faucet bodies to the wall, ensuring they are level.
- Follow the provided drawing instructions (page 5) to **respect the minimum and maximum tolerance** to the finished wall.

#### Connecting the Water Supply

- Connect the hot and cold-water supply lines to the corresponding inlets on the faucet body.
- The hot supply should be connected to the left side when viewing the faucet from the front.

#### Securing the Handles


- Attach the handles to the valve cartridges by screwing them into place. Ensure they are aligned correctly for proper operation.

#### Connect the Shower Rose and Hand Shower

- Connect the **outlets** to the shower rose. Ensure all connections are securely tightened to prevent leaks.

#### Testing

- Open the faucet and turn the water supply back on.
- Allow water to run through the faucet to flush out any remaining debris.**
- Check for any leaks around the connections and handle assembly. Tighten any loose connections as needed.

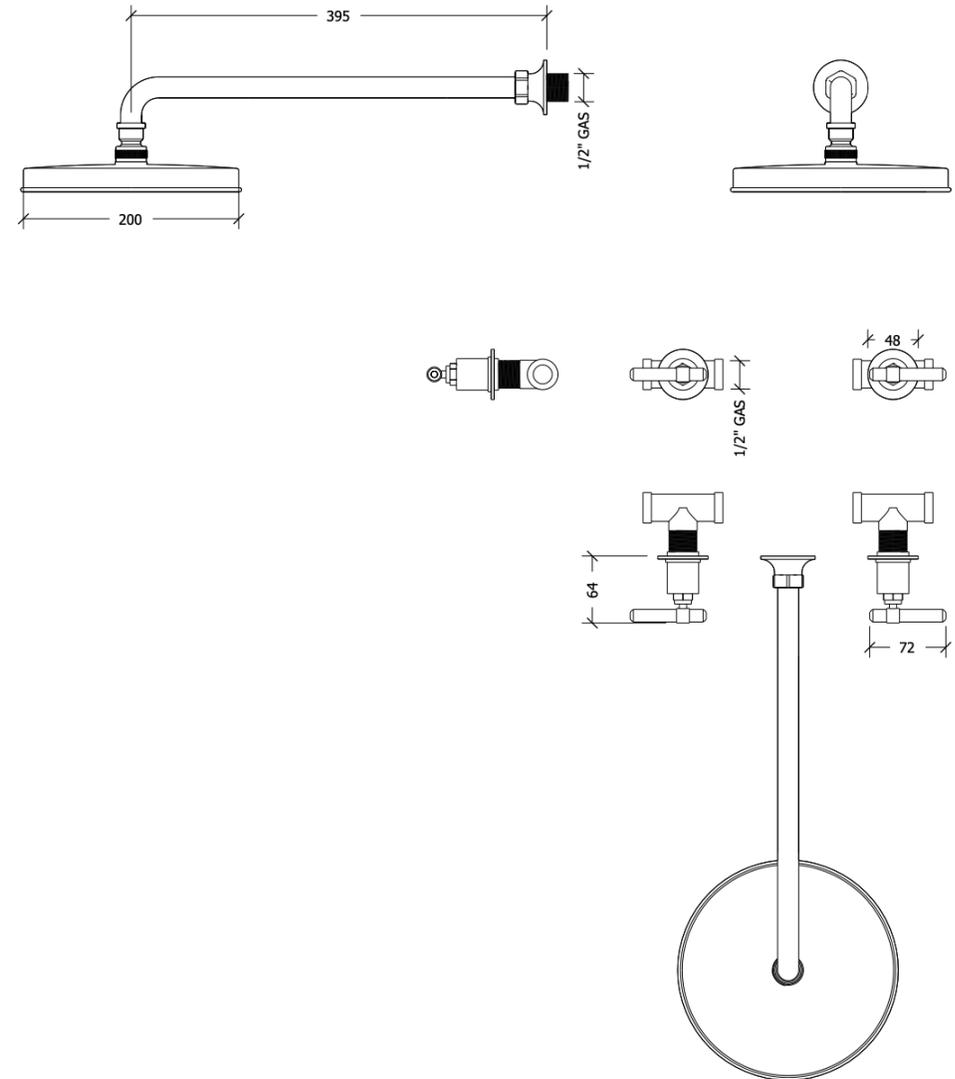

## Post-Installation Care


### Cleaning and Maintenance

Regularly clean the faucet surface with a soft cloth, lukewarm water, and mild soap. Avoid using harsh chemicals or abrasive materials. For brass finishes, use brass polish to maintain shine, except for aged or burnished brass which should not be polished.

### Lubrication

Use only silicone grease for lubrication when needed.



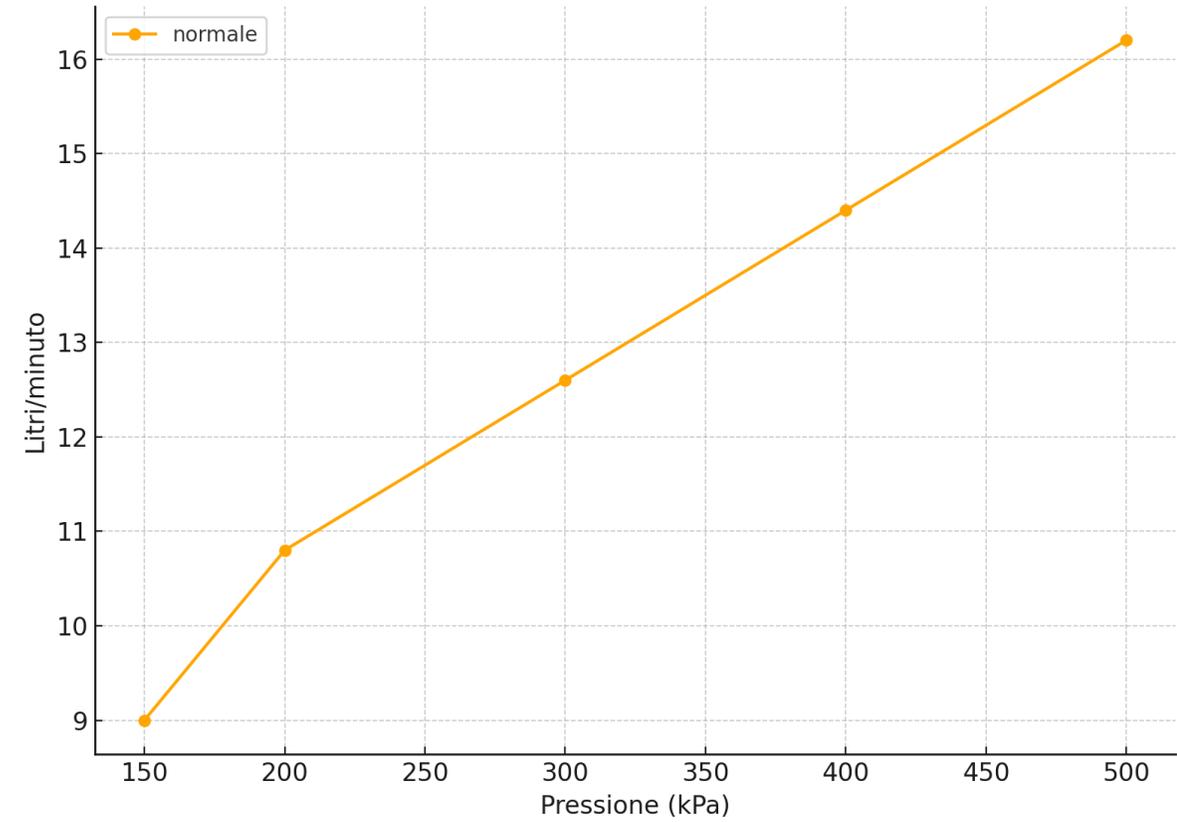

**For assistance or technical questions**

service@senese.com  
Tel: +39 0577 160 7485  
www.senese.com