

SENESE

Cielo / Cielo Sans Two Hole Deck Mounted Mixer Faucet

Installation Guideline

Cielo Two Hole Lavatory

Deck-Mounted Two-hole Lavatory Faucet

Article

| | |
|-----------------|------------------------------------|
| Polished Brass | LDX04LGCI ON 550 Eur incl. VAT |
| Polished Chrome | LDX04LGCI CR 640 Eur incl. VAT |
| Aged Brass | LDX04LGCI AB 690 Eur incl. VAT |
| Burnished Brass | LDX04LGCI BB 690 Eur incl. VAT |
| Satin Nickel | LDX04LGCI NS 790 Eur incl. VAT |
| Black Nickel | LDX04LGCI NNO 790 Eur incl. VAT |
| Gold | LDX04LGCI OR 960 Eur incl. VAT |

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.

Decalcification

Aerators and shower handles should be regularly decalcified by placing them in a vinegar bath for a couple of hours. Should limescale stains occur, use eucalyptus oil and a soft cloth.

Lubrication

Lubricate only with silicone grease.



Cielo Sans Two Hole Lavatory

Deck-Mounted Two-Hole Lavatory Faucet

Article

| | |
|-----------------|------------------------------------|
| Polished Brass | LDX04LLCS ON 550 Eur incl. VAT |
| Polished Chrome | LDX04LLCS CR 640 Eur incl. VAT |
| Aged Brass | LDX04LLCS AB 690 Eur incl. VAT |
| Burnished Brass | LDX04LLCS BB 690 Eur incl. VAT |
| Satin Nickel | LDX04LLCS NS 790 Eur incl. VAT |
| Black Nickel | LDX04LLCS NNO 790 Eur incl. VAT |
| Gold | LDX04LLCS OR 960 Eur incl. VAT |

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.

Decalcification

Aerators and shower handles should be regularly decalcified by placing them in a vinegar bath for a couple of hours. Should limescale stains occur, use eucalyptus oil and a soft cloth.

Lubrication

Lubricate only with silicone grease.



Installation Guide

Before You Begin

- 1. Turn off the Water Supply**
Ensure all water supply lines are completely shut off before beginning installation.
- 2. Flush Supply Lines**
Run water through the supply lines to clear any debris or sediment. This prevents blockages or damage to internal components of the fixture.
- 3. Isolation Valves**
We recommend installing isolation valves on the hot and cold inlet feeds for easier future maintenance.

Installation Steps:

Position the Faucet

- Insert the spout shank through the central hole on the mounting surface. Ensure the gasket is beneath the escutcheon.
- Secure the spout by threading the washers and tightening the nut underneath.
- Required hole diameter: 30 mm.
- Recommended centre-to-centre distance: 100 mm.
- Maximum distance between components: 400 mm.

Install the Handle

- Insert the handle body through its corresponding hole on the mounting surface.
- Secure using the rubber washer, metal washer, and nut beneath the surface.
- Ensure the handle is aligned correctly pointing forward for correct operation.

Connect the Water Supply

- Thread the tee fitting onto the spout shank and tighten securely. Use the provided rubber washer for a proper seal.
- Attach the flexible hoses to the tee and handle. Ensure the connections are tight but avoid over-tightening.

Flush the Faucet


Open the mixer by lifting the handle. Slowly turn on the water supply. Allow water to run for several minutes to flush out any remaining debris.

Check for Leaks

Inspect all connections for leaks. If necessary, re-tighten fittings carefully. Confirm that no water is penetrating around the deck surface, which could cause long-term damage

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

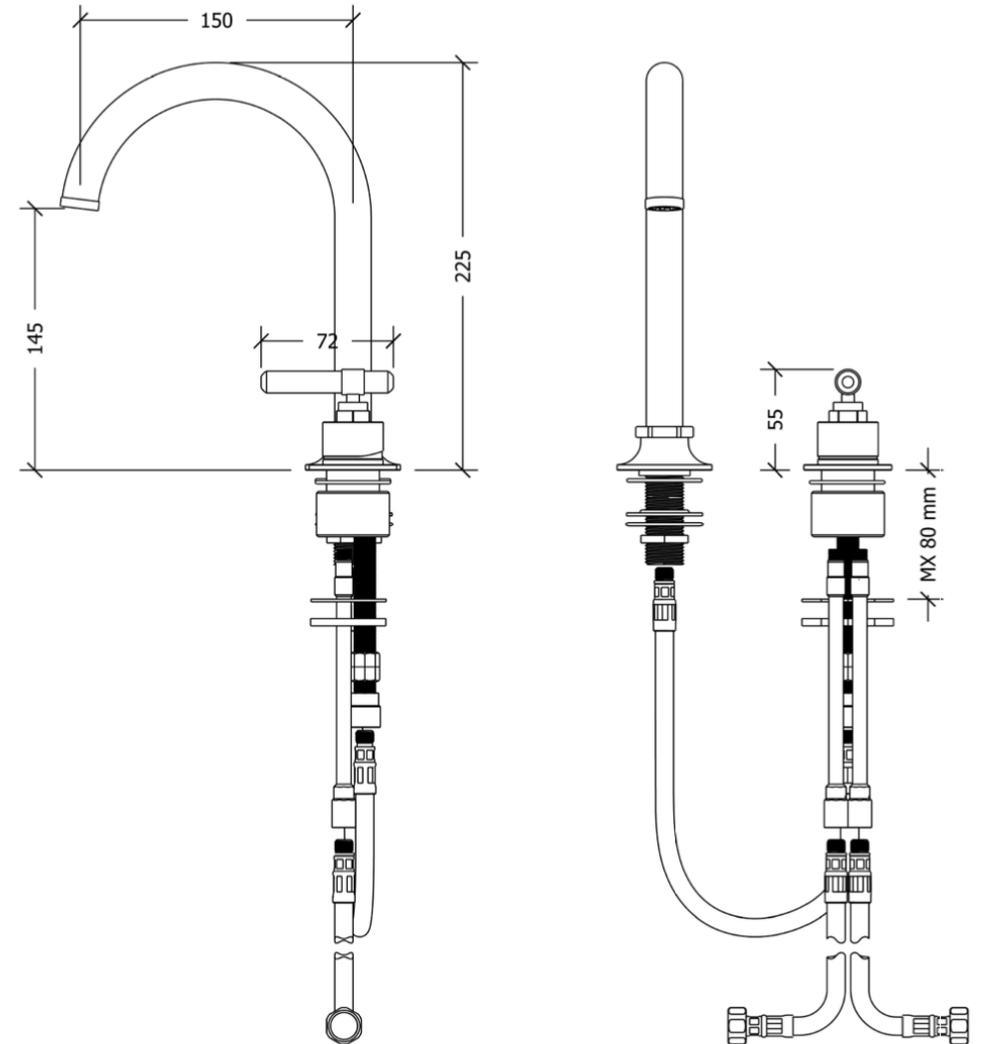

3/8-inch OD compression supply hoses are supplied for installations in the U.S. and Canada