

SENESE

Kappa Wall Mounted Basin Faucet

Installation Guideline

Kappa Three Hole Wall Mount

Wall-Mounted Three-Hole Faucet with Three Spoke Lever Handles

Article

Polished Brass	LP03MSK ON 550 Eur incl. VAT
Polished Chrome	LP03MSK CR 650 Eur incl. VAT
Aged Brass	LP03MSK AB 695 Eur incl. VAT
Burnished Brass	LP03MSK BB 695 Eur incl. VAT
Polished Nickel	LP03MSK NI 695 Eur incl. VAT
Satin Nickel	LP03MSK NS 810 Eur incl. VAT
Black Nickel	LP03MSK NNO 810 Eur incl. VAT
Gold	LP03MSK OR 970 Eur incl. VAT



Kappa Three Hole Wall Mount

Wall-Mounted Three-Hole Faucet with High-Polish Black Solid Brass Levers

Article

Polished Brass	LP03LNK ON 550 Eur incl. VAT
Polished Chrome	LP03LNK CR 650 Eur incl. VAT
Aged Brass	LP03LNK AB 695 Eur incl. VAT
Burnished Brass	LP03LNK BB 695 Eur incl. VAT
Polished Nickel	LP03LNK NI 695 Eur incl. VAT
Satin Nickel	LP03LNK NS 810 Eur incl. VAT
Black Nickel	LP03LNK NNO 810 Eur incl. VAT
Gold	LP03LNK OR 970 Eur incl. VAT



Installation Guide

Before You Begin

- 1. Turn off the Water Supply**
Ensure all water supply lines are completely shut off before beginning installation.
- 2. Flush Supply Lines**
Run water through the supply lines to clear any debris or sediment. This prevents blockages or damage to internal components of the fixture.
- 3. Isolation Valves**
We recommend installing isolation valves on the hot and cold inlet feeds for easier future maintenance.

Installation Steps:

Mounting the Faucet Body

- Attach the built-in faucet body to the wall, ensuring it is level.
- Follow the provided drawing instructions to respect the minimum and maximum tolerance to the finished wall.

Connecting the Water Supply




- Connect the hot and cold-water supply lines to the corresponding inlets on the faucet body.
- The hot supply should be connected to the left side when viewing the faucet from the front.

Securing the Handles and Spout

- Install the spout by threading it into the faucet body. Ensure it is aligned correctly with the sink.
- Attach the handles to the valve cartridges by screwing them into place. Ensure they are aligned correctly for proper operation.

Testing

- Open the faucet and turn the water supply back on.
- Allow water to run through the faucet to flush out any remaining debris.
- Check for any leaks around the connections and handle assembly. Tighten any loose connections as needed.

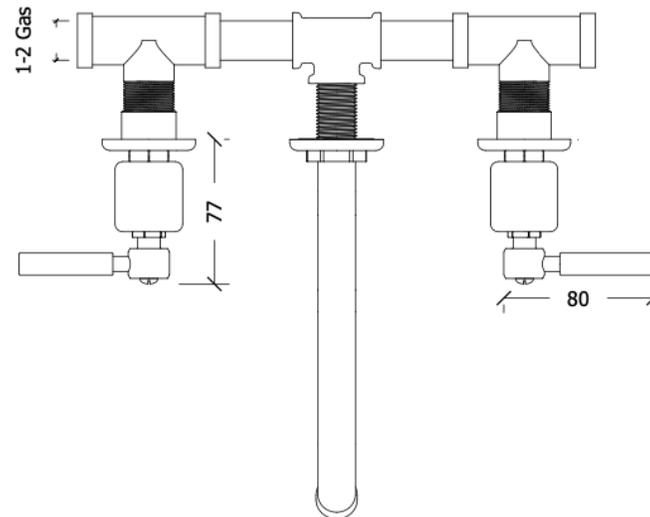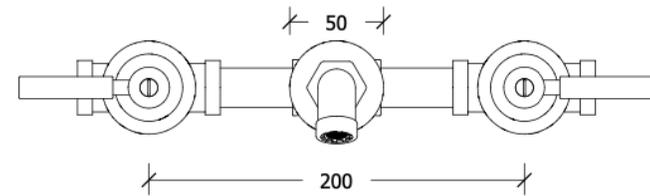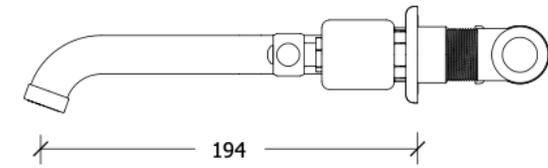

1/2" NPT Connections supplied for Installations in the US and Canada

Post-Installation Care

Cleaning and Maintenance

Regularly clean the faucet surface with a soft cloth, lukewarm water, and mild soap. Avoid using harsh chemicals or abrasive materials. For brass finishes, use brass polish to maintain shine, except for aged or burnished brass which should not be polished.

Aerator and Shower Handle Decalcification

To prevent limescale buildup, immerse aerators and shower handles in vinegar for a few hours, then rinse. Use eucalyptus oil on a soft cloth to remove limescale stains.


Lubrication

Use only silicone grease for lubrication when needed.

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

Top

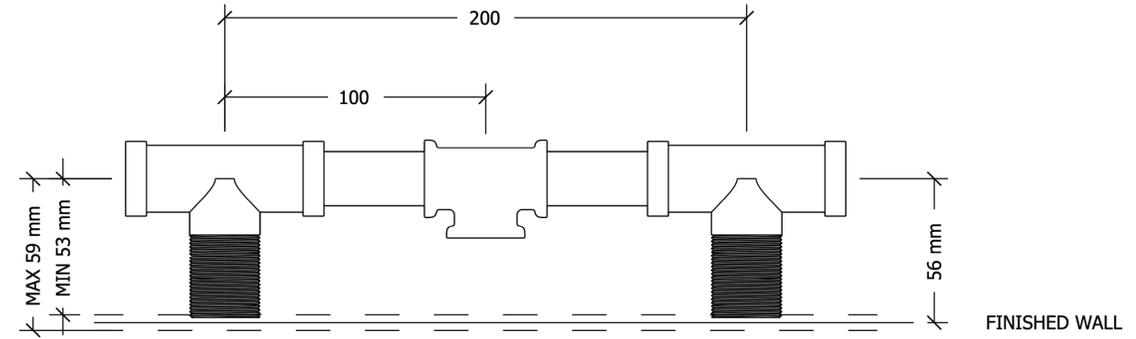

Section

