

SENESE

Nuvola Flush Plate for Geberit Sigma

Installation Guideline

Nuvola Flush Plate

Solid Brass Flush Plate

Article

Polished Brass	SEPLACSCAN ON 480 Eur incl. VAT
Polished Chrome	SEPLACSCAN CR 590 Eur incl. VAT
Aged Brass	SEPLACSCAN AB 650 Eur incl. VAT
Burnished Brass	SEPLACSCAN BB 650 Eur incl. VAT
Polished Nickel	SEPLACSCAN NI 650 Eur incl. VAT
Satin Nickel	SEPLACSCAN NS 760 Eur incl. VAT
Black Nickel	SEPLACSCAN NNO 760 Eur incl. VAT
Gold	SEPLACSCAN OR 880 Eur incl. VAT



Installation Guide for Cielo Flush Plate

Preparing the Wall


- Ensure the wall surface is tiled and levelled.
- The cut-out for the fixture in wall panels should be made according to Geberit's instructions. Tile as close to the box as possible

Installing the Mounting Frame

- Attach the mounting screws to the fixture as shown in the image (red)
- Mount the plate and align the flush rods to the flush buttons.
- Secure the plate using the provided screws by aligning them with the designated holes.
- Ensure the plate is level and firmly attached.
- Mount the Cielo flush buttons on the plate. Do not overtighten

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.

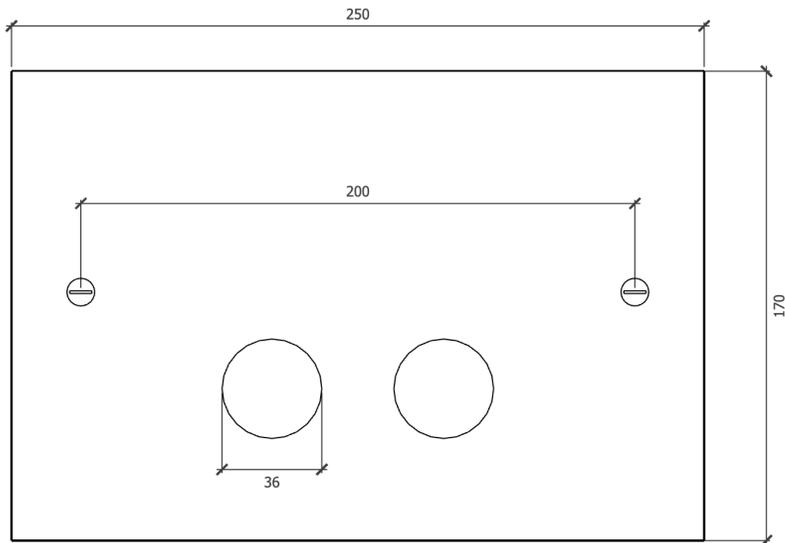

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

