

SENESE

Classic Bottle Trap

Installation Guideline

Classic Bottle Trap

Bottle Trap in Solid Brass

Article

Polished Brass SESIFBOTCLAS ON

Polished Chrome SESIFBOTCLAS CR

Aged Brass SESIFBOTCLAS AB

Burnished Brass SESIFBOTCLAS BB


Satin Nickel SESIFBOTCLAS NS

Black Nickel SESIFBOTCLAS NNO

Gold SESIFBOTCLAS OR

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.

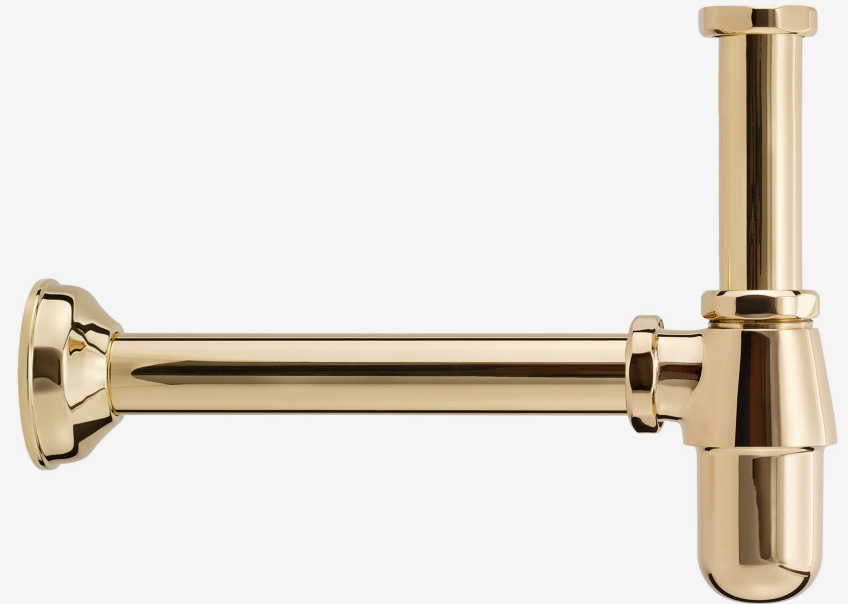

Installation Guide

Preparation

Ensure the area under the sink is clean and free of debris.

Verify that the sink's drain outlet and wall drainage outlet are properly aligned.

Attach to the Sink Drain

Connect the upper section of the bottle trap to the sink drain outlet.

Tighten by hand, refrain from using any grappling tools as this can damage the surface finish.

Avoid over-tightening

Adjust the Pipes

Measure the required lengths for the vertical and horizontal pipes to fit your sink and drainage system.

Cut the pipes to the appropriate lengths.

Smooth the cut edges to avoid sharp ends or uneven surfaces.

Connect to the Wall Drainage Outlet

Align the horizontal pipe of the bottle trap with the wall drainage outlet.

Insert the pipe into the outlet and secure it using the supplied mounting components.

Check that the connection is firm and well aligned.

Test for Leaks

Turn on the water supply and run water through the sink.

Inspect all connections for any leaks.

Tighten further if leaks are found.

For assistance or technical questions

service@senese.com

Tel: +39 0577 160 7485

www.senese.com

