

SENESE

Kappa Hand Shower Sliding Bar

Specification and Installation Guide

Kappa Hand Shower Sliding Bar

Sliding Bar with Hand Shower

Article

Polished BrassASTSALD1SK ON

Polished ChromeASTSALD1SK CR

Aged BrassASTSALD1SK AB

Cold Aged BrassASTSALD1SK ABF

Burnished BrassASTSALD1SK BB

Polished NickelASTSALD1SK NI

Satin NickelASTSALD1SK NS

Black NickelASTSALD1SK NNO

English GoldASTSALD1SK OI

GoldASTSALD1SK OR



Installation Guide

Before You Begin

Water Supply

Isolate the shower supply before connecting the wall outlet. Flush the supply pipe thoroughly to remove debris.

Position and Wall Support

Choose a position that allows comfortable adjustment of the hand shower and free movement of the hose. Check the wall for concealed pipes and cables before drilling.

Installation Steps

Mount the Sliding Rail

Set out the wall-mount centres vertically at 700 mm. Check the centres against the actual rail before drilling. Use fixings suitable for the wall construction and secure both mounts to a sound substrate.

Fit the Wall Outlet and Hose


Position the separate wall outlet to suit the installation and allow the hose to hang freely. Water connection: G1/2" BSPP. Use the correct sealing method for the supplied components. Fit the hose with its sealing washers and connect the hand shower. Avoid overtightening and protect all finished surfaces.

Adjust the Hand-Shower Holder

Support the hand shower, release the holder, slide it to the required height and secure it. Check that the hand shower sits firmly in the holder.

Testing

Restore the supply slowly. Run the hand shower, check all connections for leaks and verify that the holder remains secure throughout its adjustment range.

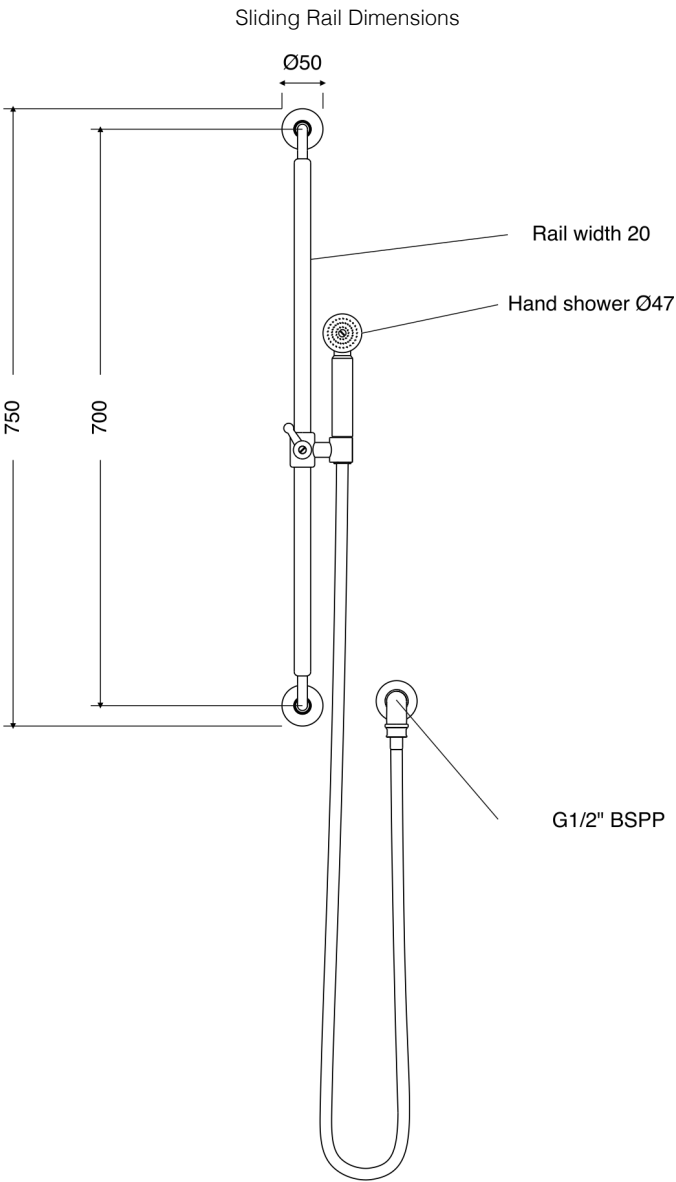

Front elevation

All dimensions in millimetres

Post-Installation Care

Cleaning and Maintenance

Wipe the surface with a soft cloth, lukewarm water and mild soap. Avoid alkaline, acidic and abrasive cleaners. Rinse and dry with a soft cloth.

Brass Finishes

Brass naturally develops a patina. Polished brass may be polished with a suitable brass polish. Do not polish aged or burnished brass finishes.

Hand Shower and Hose

Check the spray face for debris or limescale and clean accessible components carefully. Rinse thoroughly before refitting. Check the hose and its connections periodically for damage or leaks.

Sliding Holder

Keep the rail clean. Support the hand shower when adjusting its height and release the holder before moving it.

Lubrication

Use only silicone grease where lubrication is required.

Technical Data

Water connection: G1/2" BSPP

Wall-mount centres: 700 mm

Overall height across rail wall plates: 750 mm

Wall-plate diameter: 50 mm


Position the wall outlet to suit the site and supplied hose.
Confirm dimensions against the product before installation.

For assistance or technical questions


service@senese.com

Tel: +39 0577 160 7485

www.senese.com

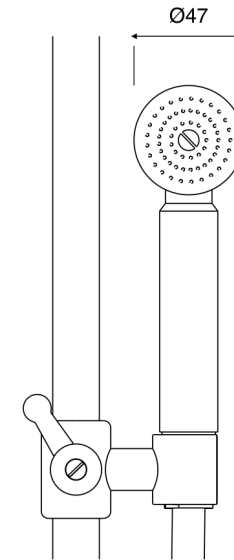

Hand shower and sliding holder

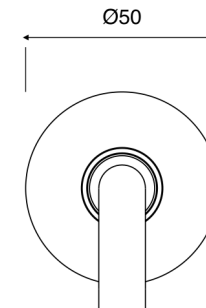

Upper wall mount

All dimensions in millimetres