

SENESE

Cielo Aureo

Concealed Shower Set with 2-Way Diverter

Article

Cielo Aureo **DS200DLGCI**

Technical Data

Operating pressure 1.5–4.5 bar recommended

Valve centres 200 mm

First-fix tolerance 7 mm (± 5 mm) from finished wall

Wall connections G1/2-inch BSPP

US / Canada 1/2-inch NPT adapters supplied

Measured Flow

12.6 L/min at 3.0 bar


Flow rates may vary according to installation conditions, water temperature and local supply characteristics.

For assistance or technical questions

service@senese.com

Tel: +39 0577 160 7485

www.senese.com

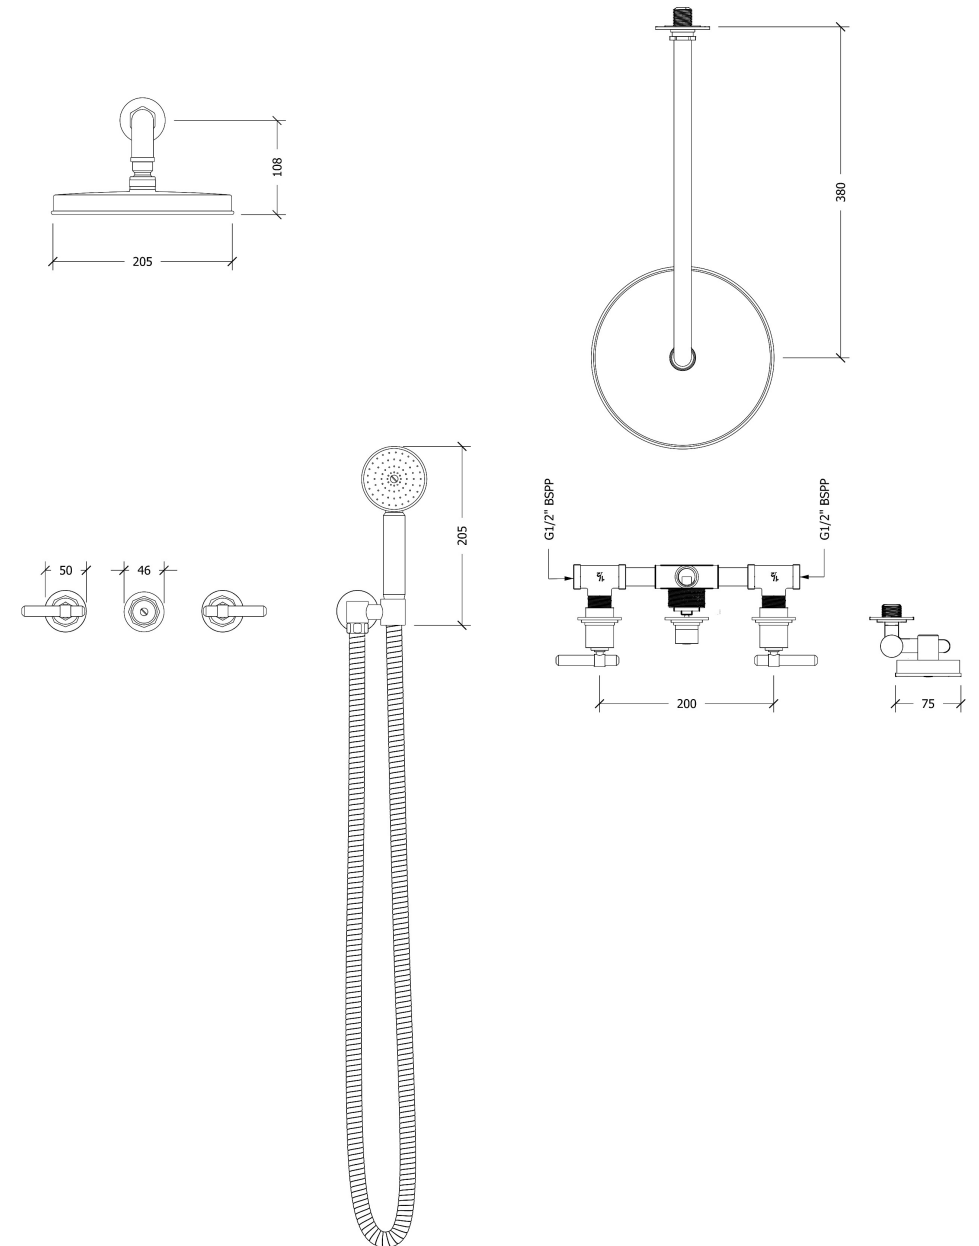

Technical Drawing, Dimensions shown in millimetres