

SENESE

Cielo Sans Exposed Shower

Specification and Installation Guide

Cielo Sans Exposed Shower

Exposed Shower

Article

Polished Brass	DS200LCS ON
Polished Chrome	DS200LCS CR
Aged Brass	DS200LCS AB
Cold Aged Brass	DS200LCS ABF
Burnished Brass	DS200LCS BB
Polished Nickel	DS200LCS NI
Satin Nickel	DS200LCS NS
Black Nickel	DS200LCS NNO
English Gold	DS200LCS OI
Gold	DS200LCS OR



Installation Guide

Before You Begin

Shut off the water supply. Flush both supply lines to remove debris before making connections. Install accessible isolation valves for future servicing.

Prepare the First Fix / Wall Connections

Install the 1/2-inch female wall connections recessed between 2 and 10 mm from the finished wall surface. Position the hot supply on the left and the cold supply on the right when viewed from the front. Set the hot- and cold-water wall connections at 180 mm centre-to-centre, as shown in the first-fix drawing on page 4.

Fit the Mixer Body


Screw the supplied inlet connectors into the female wall connections. Adjust their position to align with the mixer body, then fit the O-rings onto the inlet connectors. Fit the mixer body onto the connectors and ensure it is level. Secure the body using the fixing screw beneath it. Tighten securely without overtightening.

Fit the Riser and Shower Rose

Connect the riser to the mixer outlet. Secure the upper wall bracket using fixings suitable for the wall. Fit the upper arm and shower rose, ensuring seals are correctly seated. Hand-tighten the shower rose. Do not use tools directly on finished surfaces.

Test the Installation

Restore the water supply slowly. Operate the mixer and select each outlet with the diverter. Check all connections for leaks and confirm correct control operation. Check that the riser and wall bracket are secure.

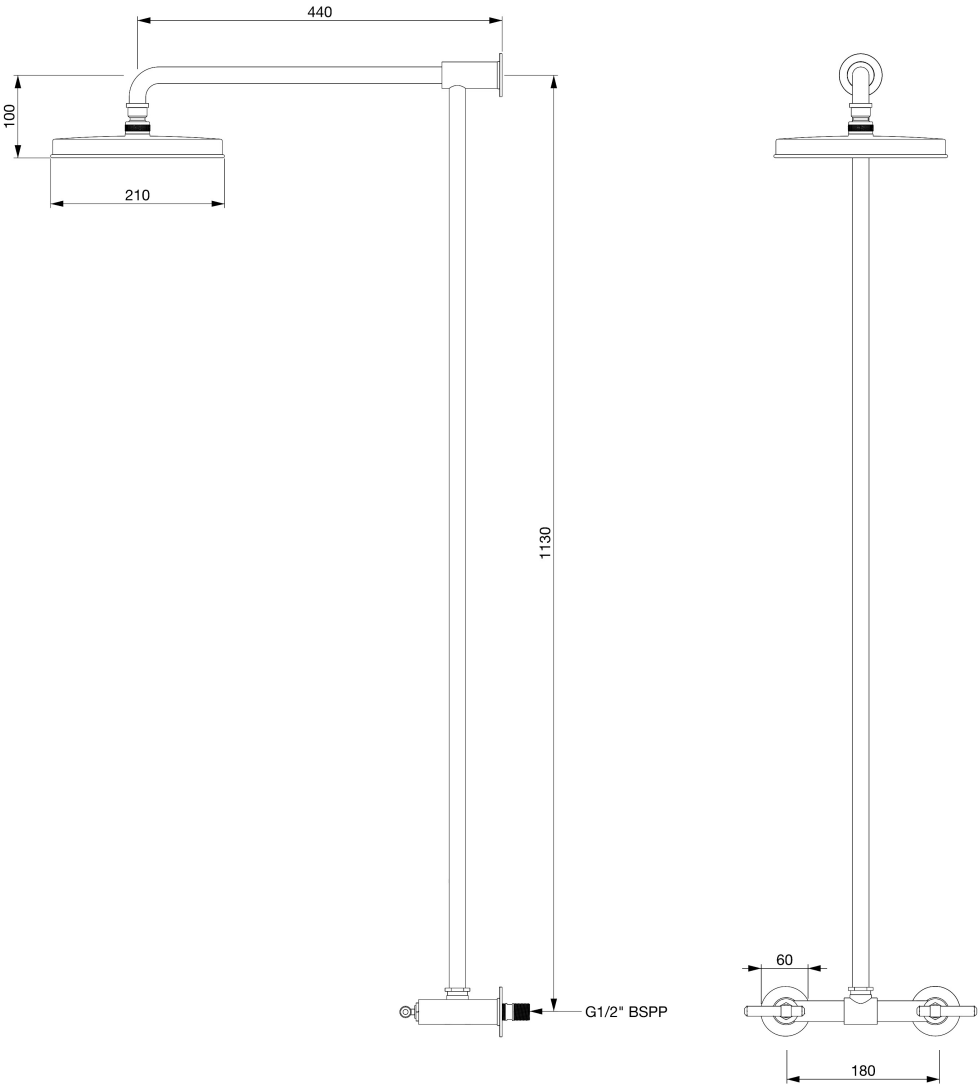

All dimensions in millimetres

US / Canada: 1/2-inch NPT first fix and adapters supplied

Post-Installation Care

Cleaning and Maintenance


Clean with a soft cloth, lukewarm water and mild, neutral soap. Avoid abrasive cleaners and products containing acids, alkalis or bleach. Use brass polish only on Polished Brass. Do not polish Aged Brass, Cold Aged Brass or Burnished Brass, which develop a patina.

Shower Rose and Hand-Shower Maintenance



Periodically check the spray nozzles for debris or limescale. Clean carefully and rinse thoroughly.

Lubrication

Use only silicone grease where lubrication is required.

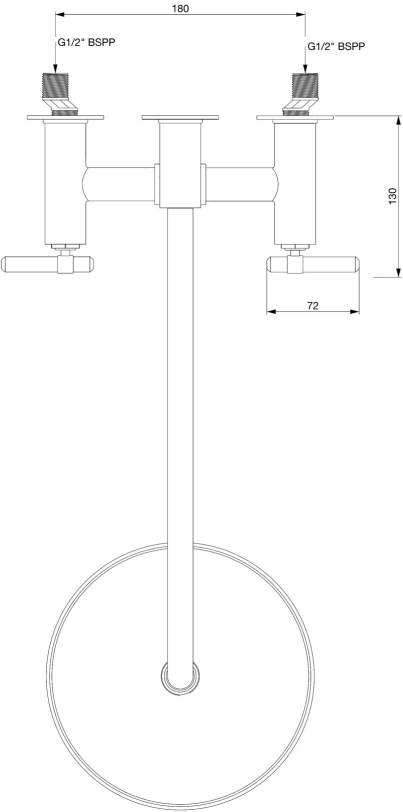

First-Fix Valve

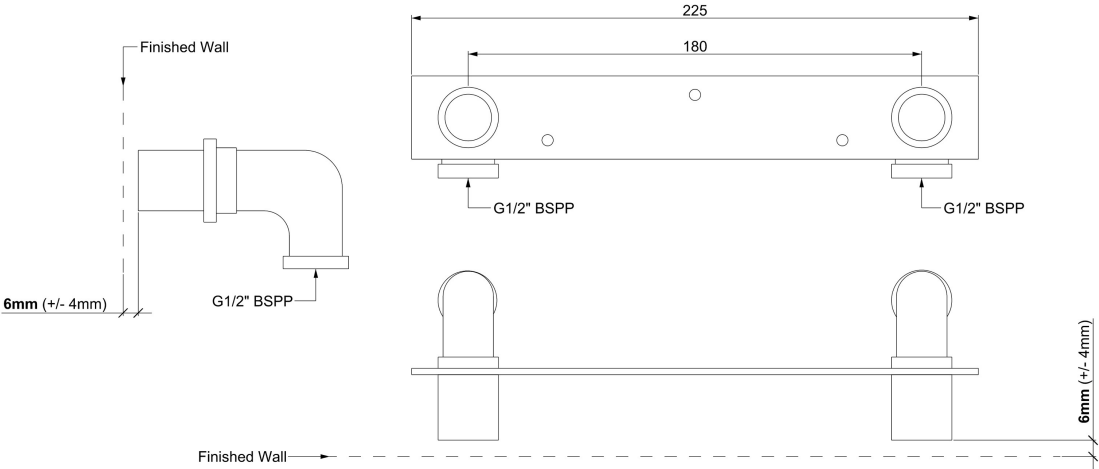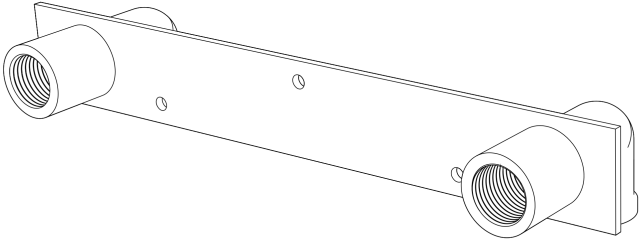

All dimensions in millimetres

US / Canada: 1/2-inch NPT first fix and adapters supplied

Technical Data & Flow Performance

Product
Cielo Sans Exposed Shower
Article: DS200LCS

Technical Data
Connections: G1/2-inch BSPP
US / Canada: 1/2-inch NPT first fix and adapters supplied

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

