

SENESE

Cielo Aureo

Concealed Shower Set with Separate Hot and Cold Controls

Article
DS200LGCI

Technical Data

Operating pressure 1.5–4.5 bar recommended
Connections 1/2-inch BSPP
Controls Separate hot and cold valves
US / Canada 1/2-inch NPT adapters supplied

Dimensions

Shower rose Ø210 mm
Shower arm projection 380 mm
Control plates 2 × Ø50 mm
Shower arm wall plate Ø60 mm
Shower rose assembly height 110 mm

Flow Performance


Measured flow 12.6 L/min at 3.0 bar
Indicative flow 14.5 L/min at 4.0 bar

The left control regulates hot water and the right control regulates cold water.

Flow rates refer to dynamic inlet pressure. Only the 3.0 bar value is measured. Confirm test conditions with Senese. Actual flow may vary with installation and water supply.

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

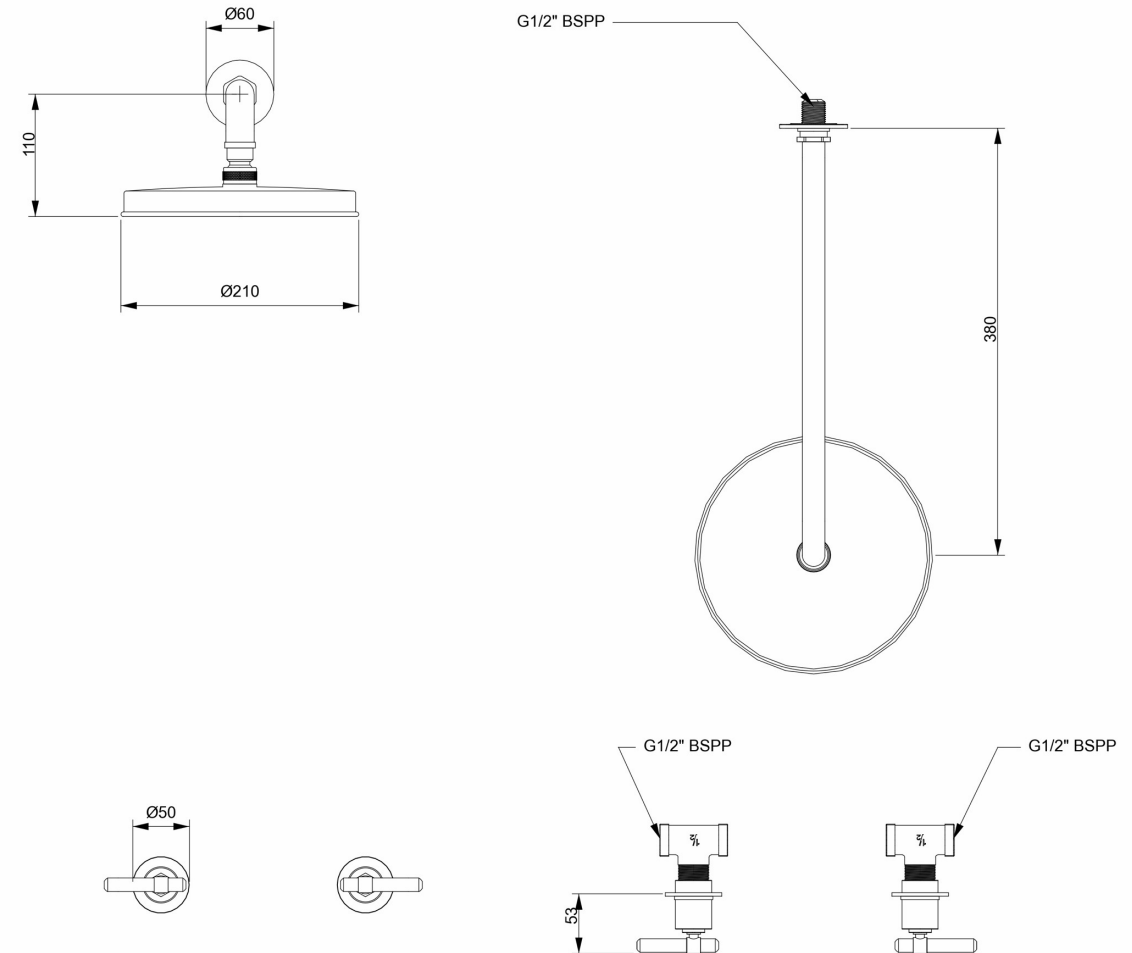

Technical Drawing, Dimensions shown in millimetres