

SENESE

Cielo Aureo

Thermostatic Shower Set with 2-Way Diverter

Article
TDS200TLGCI

Technical Data

Operating pressure 1.5–4.5 bar recommended
Connections 1/2-inch BSPP
Diverter 2-way
US / Canada 1/2-inch NPT adapters supplied

Dimensions

Shower rose Ø210 mm
Shower arm projection 380 mm
Control plates Ø90 mm / Ø120 mm
Hand shower Ø75 mm
Hose length 1500 mm

Measured Flow


Unrestricted 18.0 L/min at 3.0 bar; 22.0 L/min at 4.0 bar
With regulator 9.0 L/min at 3.0 bar; 9.5 L/min at 4.0 bar

An optional flow regulator is available to reduce water consumption.

Flow rates may vary depending on the selected outlet and installation conditions.

For assistance or technical questions

service@senese.com
Tel: +39 0577 160 7485
www.senese.com

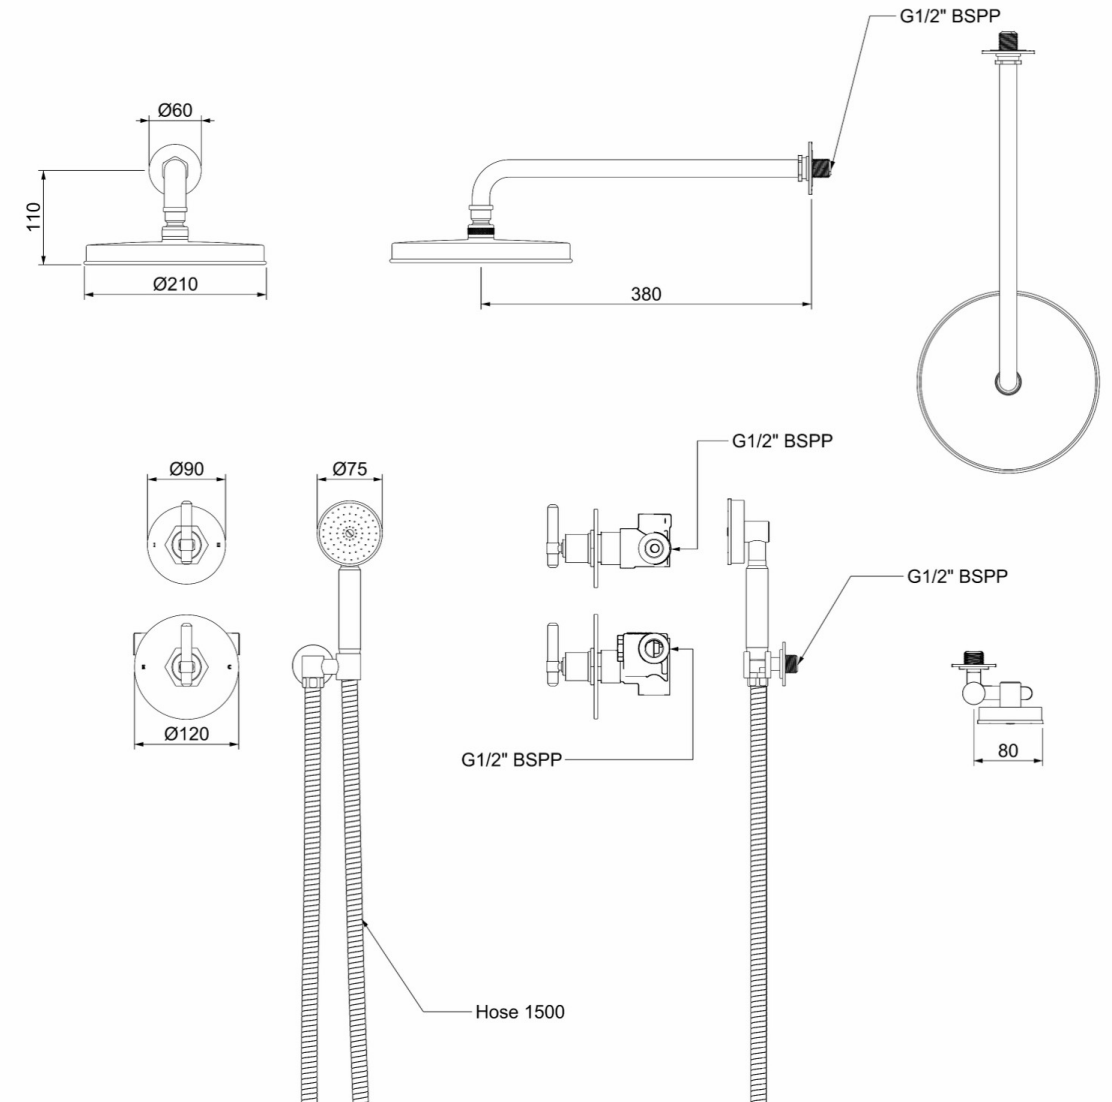

Technical Drawing, Dimensions shown in millimetres