

SENESE

Cielo / Cielo Sans Modular Electric Towel Rail

Installation Guideline

senese.com

Senese Srl p.iva 01602790527
Loc. Frassi 34, 53011 Castellin in Chianti

Cielo Modular Electric Heater

Modular Electric Towel Rail

Article

Polished Brass	SETERBARE3CI ON 2.295 Eur incl. VAT
Polished Chrome	SETERBARE3CI CR 2.595 Eur incl. VAT
Aged Brass	SETERBARE3CI AB 2.795 Eur incl. VAT
Burnished Brass	SETERBARE3CI BB 2.795 Eur incl. VAT
Satin Nickel	SETERBARE3CI NS 3.095 Eur incl. VAT
Black Nickel	SETERBARE3CI NNO 3.095 Eur incl. VAT
Gold	SETERBARE3CI OR 3.695 Eur incl. VAT

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.



Cielo Sans Modular Electric Heater

Modular Electric Towel Rail

Article

Polished Brass	SETERBAR3CL ON 2.295 Eur incl. VAT
Polished Chrome	SETERBAR3CL CR 2.595 Eur incl. VAT
Aged Brass	SETERBAR3CL AB 2.795 Eur incl. VAT
Burnished Brass	SETERBAR3CL BB 2.795 Eur incl. VAT
Satin Nickel	SETERBAR3CL NS 3.095 Eur incl. VAT
Black Nickel	SETERBAR3CL NNO 3.095 Eur incl. VAT
Gold	SETERBAR3CL OR 3.695 Eur incl. VAT

Cleaning

Wipe the surface with a soft cloth and lukewarm water and possibly with soap solution. Avoid alkaline, acid-liming or abrasive cleaners. Brass is a material that over time gets a beautiful patina but can be polished with brass polish. Aged and Burnished Brass also gets patina but should not be polished. The galvanized surfaces retain their lustre.



Cielo / Cielo Sans Modular Electric Heater

Modular Electric Towel Rail

Installation Guide

Before You Begin

- Installation must be carried out by a qualified electrician in accordance with local electrical regulations.
- Always isolate the power supply before starting any work.
- The heater is electric only. It is not connected to the plumbing system.
- Each bar has a power output of 60 W.
- The unit is supplied without thermostat. Control is either via a built-in on/off button (if specified) or via an external wall switch.
- Fixing screws and wall plugs are not supplied and must be selected by the installer according to wall type.

1. Electrical preparation

Prepare a concealed electrical outlet or wall box at the connection point, indicated in red.
Ensure the supply voltage and electrical protection comply with local standards for bathroom installations.

2. Mounting the structure

Fix the mounting structure or individual bars to the wall using suitable screws.
Do not fully tighten until final alignment is checked.
Carefully follow the indicated **minimum and maximum tolerance against the finalized wall**.

3. Electrical connection

Feed the electrical cable through the connection outlet into the towel rail connection point.
Connect live, neutral and earth according to local electrical regulations.
Ensure all connections are secure and properly insulated.


4. Final assembly and alignment

Position the escutcheon covers on each bar, ensure the o-ring is correctly seated inside each cover.
Connect live, neutral and earth to each bar, slide them into place and fasten the securing screw.
Slide the escutcheon covers flush to the wall.


5. Power-on and functional test

Restore power at the main supply.
Switch the unit on using the button or wall switch.
Allow the towel rail to heat up and confirm uniform warmth across all bars.
Verify correct operation.


Front

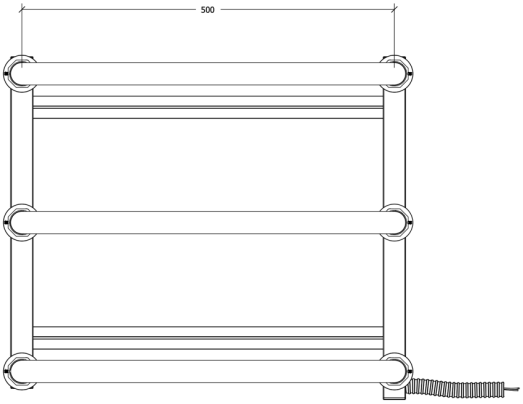

Top

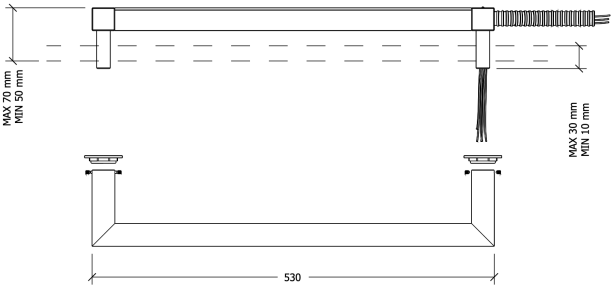

Side

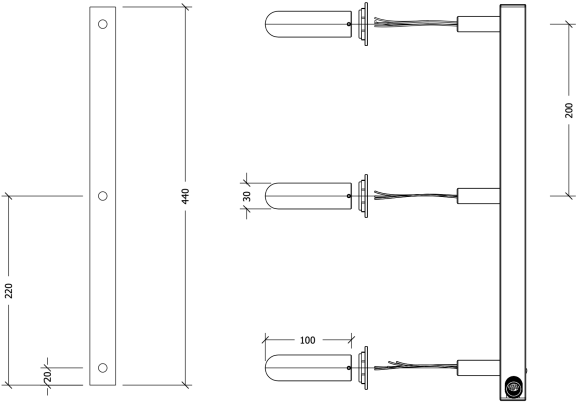

Cielo / Cielo Sans Modular Electric Heater

Modular Electric Towel Rail

Care and Maintenance

Clean only with a soft cloth and lukewarm water, optionally with mild soap.

Do not use abrasive, acidic or alkaline cleaners.

Polished brass can be lightly polished if desired.

Aged and burnished brass should not be polished, as natural patina is part of the finish.

